

lite:HUB *and* lite:SWITCH

Asterisk


LIGHTING INNOVATIONS

INSTALLATION & OPERATION



lite:HUB


lite:HUB is required to power & control all lite products. This includes Insetta, Bar, and Strip. lite:HUB comes in 2 sizes; #LH72 for up to 200" or 72 watts of light. #LH144 for up to 400" or 144 watts of light. Plugs into a regular wall outlet. Output is 24VDC.

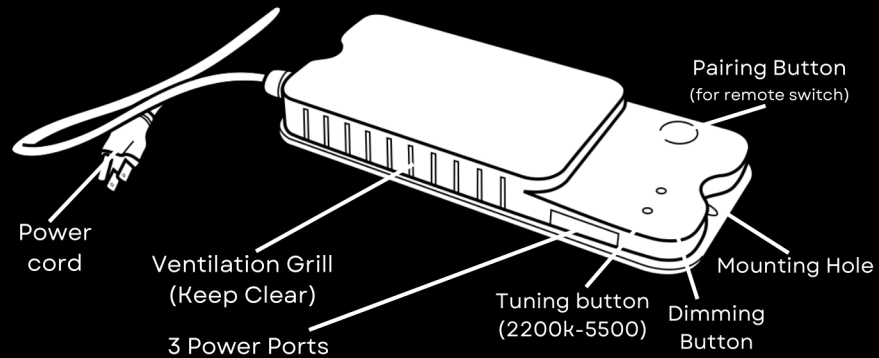


lite:SWITCH

- Option to control lite:HUB.
- Looks like a regular Decora style switch
- Self powered, no battery or power connection needed.
- Tunes the light with the top of the switch
- Dims with the bottom of the switch

#LSF Fixed base Remote Switch

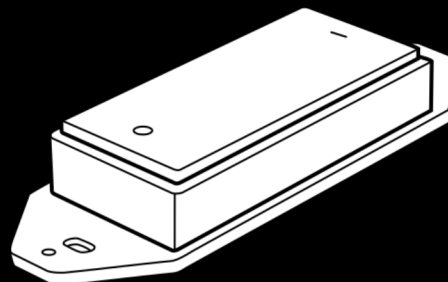

#LSM Magnetic base Remote Switch

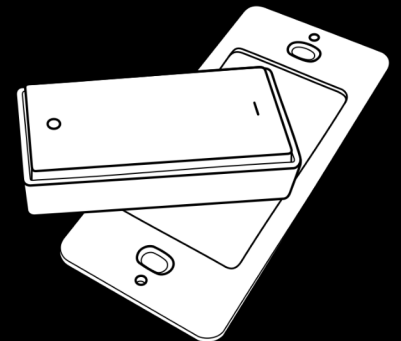

#LSF Fixed base Remote Switch

#LSM Magnetic base Remote Switch

Questions?



732.747.4353

info@AsteriskLighting.com



Installation

Find a ventilated, dry space within 10 feet of the proposed light location. Make sure there is a 120v outlet accessible. Mount the HUB with the 2 included screws. Do not plug it in until all the lights are set up and ready to connect.

Do not exceed 72 watts or 200' of light per wire. see each individual product for wiring instructions. Once all the lights are wired up, plug the HUB into the wall outlet. Then plug each wire into the HUB.

Operation

Use the buttons on the HUB to set the light levels. Hold the DIM button to increase the brightness of the lights. Hold it again to decrease the brightness. Hold the TUNE button to make the color temperature of the lights warmer. Hold it again to make the color temperature of the lights cooler. Touch either button to turn the lights on or off.

The HUB can also be plugged into a switched outlet. The HUB will remember the settings if it loses power.

Adding a Switch

Use the PAIR button to add a remote switch. Just hold the PAIR button for three seconds, and then push the switch once quickly.

Hold the bottom of the switch to increase the brightness of the lights. Hold it again to decrease the brightness. Hold the top of the switch to make the color temperature of the lights warmer. Hold it again to make the color temperature of the lights cooler. Touch either end of the switch to turn the lights on or off.

The switch is self-powered. It does not need a battery or any other power source. Finish the installation of the switch with a standard Decora-style switch plate.



Questions?

732.747.4353

info@AsteriskLighting.com

